

8272201001

TPA/GMT Fuse Panel

-/+24 to 48V DC

Positions Per Bus
4 TPA - 10 GMT

Max Per Position
50A TPA - 15A GMT

Bus Capacity
225 Amps



GENERAL

Dimensions	19.00" W x 3.50" H x 12.125" D
Rack Space	2U
Weight	11.0 lbs.
Mounting	Universal 19" or 23", WECO or EIA
Mtg. Pos.	Flush, 3" or 4" Offset
Finish	Black Textured Powder Coat

ELECTRICAL

Input	Nominal Voltage	-/+24-48V DC
	Voltage Range	-/+19-60V DC
	Number of Buses	2
	Intr. Device Rating	300 Amps
Output	Max Fuse Rating	TPA Fuse - 50 Amp GMT Fuse - 15 Amp
	Continuous Load Rating	TPA Fuse - 40 Amps GMT Fuse - 10.5 Amps

ALARMING

Indicators	Green (Power)/Red (Alarm)
Function	Form C relay contacts for remote fuse and power fail indication
Conn. Type	Solderless Wire Wrap (18 to 30 AWG)
Rating	DC 30W/AC 50VA

CONNECTIONS

Input	2 Hole Lug	3/8" stud x 1" spacing
	Wire Range	Up to 500 kcmil
	Max. Terminal Width	1.400"
	Tightening Torque	190 in-lb (21.5 Nm)
Output	Barrier Strip Output	TPA - #8 Sems Screw, GMT #6 Sems Screw
	Wire Range	TPA - 6 to 22 AWG GMT - 10 to 22 AWG
	Tightening Torque	10 in-lb GMT - 16 in-lb TPA
Ground Bus	2 Hole Lug	1/4" stud x 1" spacing
	Wire Range	2 AWG lug supplied with panel

ENVIRONMENT


Short Term Op Temp	-40° C to +70° C
Ambient	Up to 65° C
Store Temp	-40° C to +70° C
Humidity	0 to 95% non-condensing
Power Dissipation	60.44 Watts max

STANDARDS

Safety <small>(Listed)</small>	UL 60950-1/UL 1801/CSA C22.2 No.60950-1/EN 60950-1/IEC 60950-1
Telcordia	NEBS Level 3 (GR-63/GR-1089) and GR-3108 Class 3 (w/o salt fog testing)

10/4 GMT TPA Fuse Panel, Stud Input, Barrier Output, 2U

8272201001

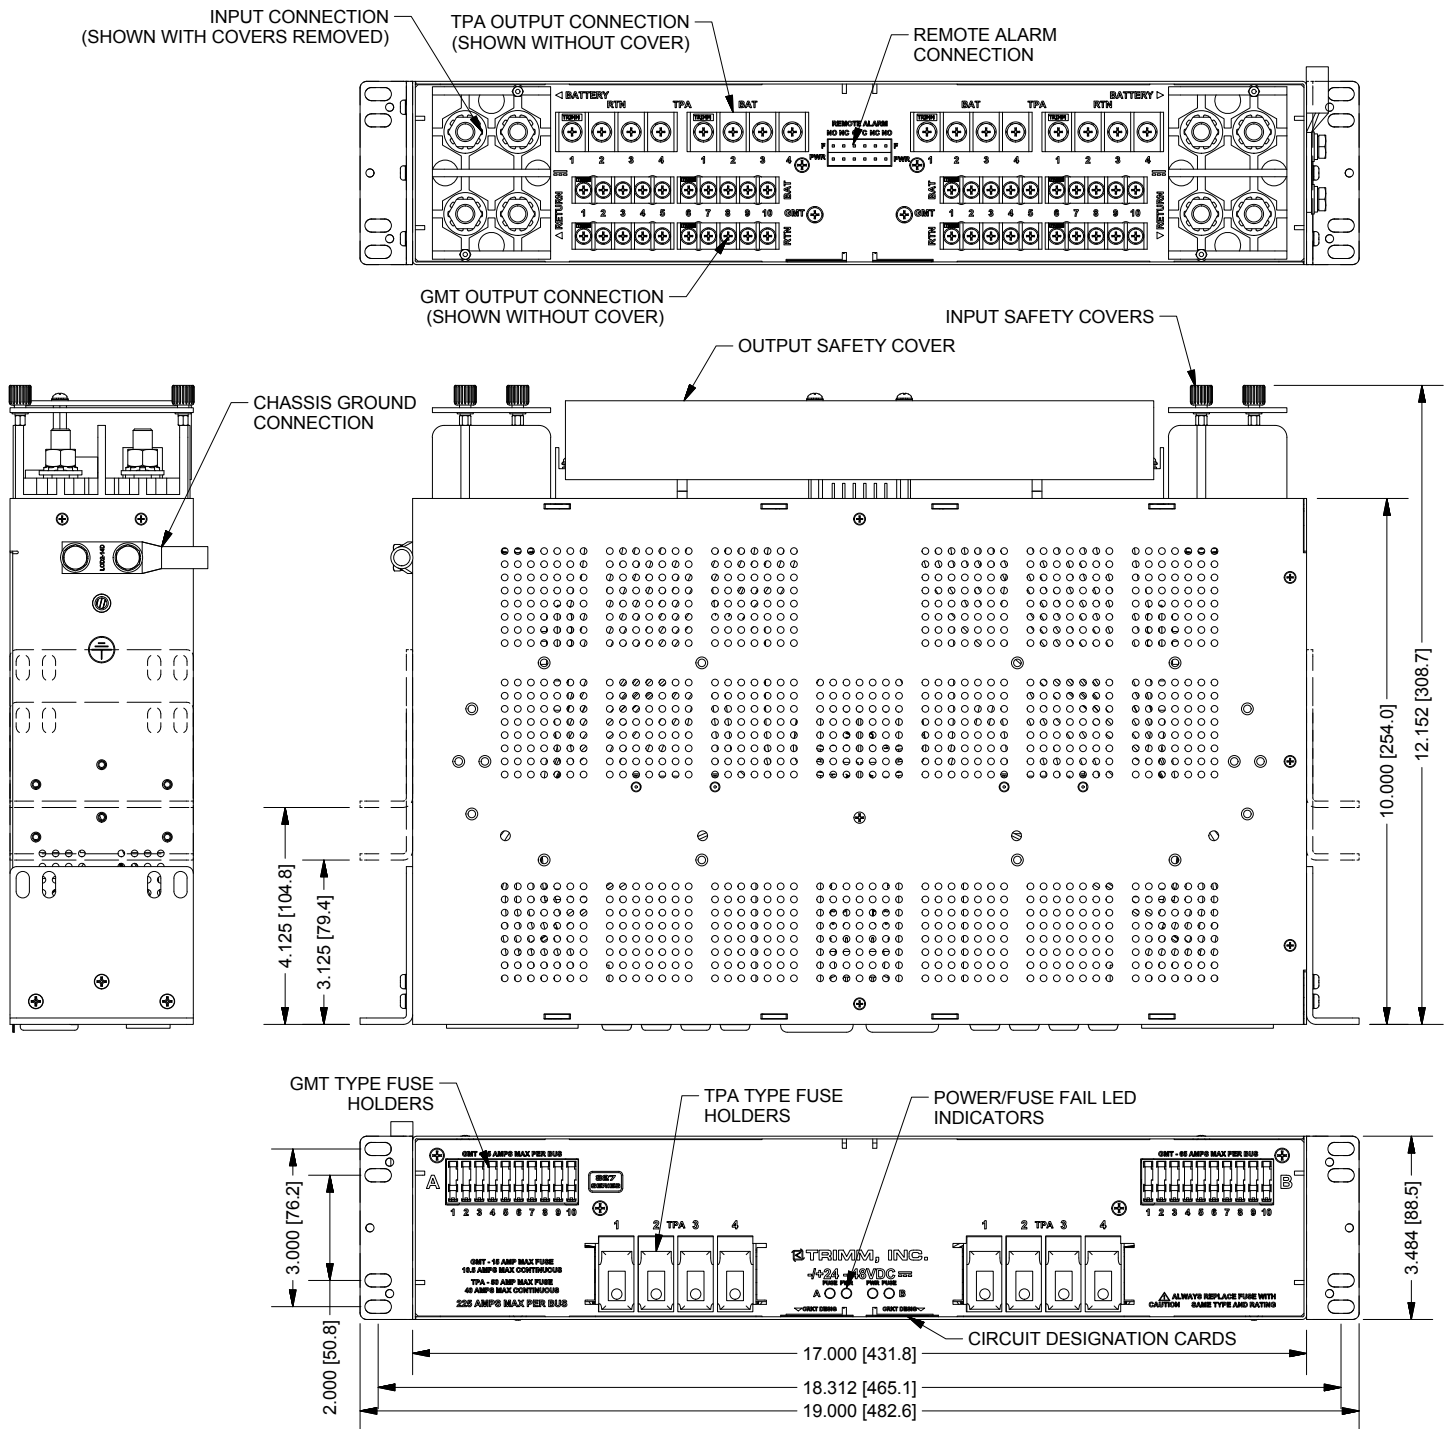

NOTES

Go to www.triminc.com for a complete list of the fuses to order with this panel.